


## Swinging Arm & Frame Protectors

### Fitting and Care Instructions



#### Fitting

- Clean frame/swinging arm.
- Remove the covering film from the protector panel(s).
- Thread the zip ties through the holes in the protectors as shown in the diagram.
- Beta Rev3 Frame Protectors: Remove the front two side screws which hold the mud guard on: the protector tucks under the mudguard and secures using these screws.
- Fit the protector against the frame/swing arm, making sure you have the correct side, left or right.
- Check for a snug fit and thread the zip ties around the back of the frame/swing arm and then tighten. Trim the excess tie.
- Make sure that the protectors or zip ties don't clash with any moving parts, or trap any cables or brake hoses.

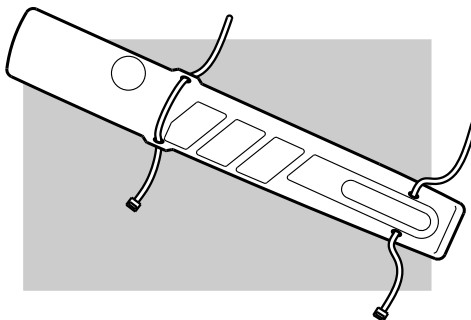

#### Care and maintenance

- Before each use, check that the protectors are fitted closely and securely to the bike.
- Do not clean with solvent based products and avoid directly jet washing the labels.
- Periodically remove and clean behind the protectors to prevent a build up of grit and mud from scratching the bike (as often as once every ride in muddy conditions).